


ForPOS



VI 650 IEC UPS Specification

Key Features

- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ-11 surge protection
- Monitoring software included
- Green function for energy saving

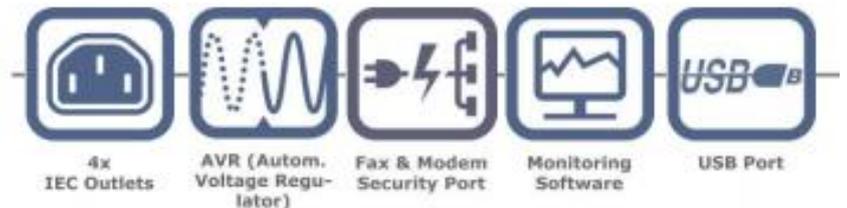

Product Features		Connections	
Capacity	650VA/360W	Interface	USB
Input Voltage	220/230/240VAC	Outlets	4x IEC
Input Voltage Range	170-280VAC \pm 7%	Surge Protection	RJ-11 (in/out)
Output Voltage	220/230/240VAC	Software & System Requirements	
Voltage Regulation (Battery Mode)	\pm 10%	Software	WinPower
Output Frequency	50Hz or 60Hz	Operating System	For details visit: www.forpos.co.uk
Frequency Regulation (Battery Mode)	\pm 1Hz	Other	1x USB port
Output Waveform	Simulated Sine Wave	Product Details	
Battery		Dimensions	279 x 100 x 143 mm
Type	12V / 7Ah	Colour	Black
Quantity	1x	Weight	4.4 kg
Recharge Time	6h for 90% after complete discharge	Model Code	PWUPS-650
Transfer Time		Environment	
Typical	4-8 ms	Temperature	0°C – 40°C
LED Indicators		Humidity	0% - 90% RH (non-condensing)
AC Mode	Green LED lighting	Full Protection	
Battery Mode	Green LED lighting	Discharge Prevention	Yes
Audio Indicators		Deep Discharger	Yes
Battery Mode	Beep every 10 sec	Overcharge	Yes
Low Battery	Beep every second	Overload	Yes
Fault	Continuous Beep		
Overload	Beep every 0.5 sec		

ForPOS Ltd
Unit G4, Kingston Business Park
Kingston Bagpuize
Oxford
OX13 5FE

ForPOS

T: +44 (0) 1865 820 925 E: info@forpos.co.uk
W: www.forpos.co.uk