

# XT-7315



Specification		XT-7315
Processor		Intel Coffee Lake Celeron G4900T Intel Coffee Lake Pentium G5400T Intel Coffee Lake Core i3-8100T Intel Coffee Lake Core i5-8500T Intel Coffee Lake Core i7-8700T
System Memory		DDR4 SO-DIMM x 2, max. 32 GB
Storage Device		SATA connector x 2
RAID Function		N/A
Intel vPro Support		N/A
TPM Support		TPM 2.0
OS Support		Windows 10 IoT 64 bit
Display & Touch		
LCD		15" TFT LCD
Resolution		1024 x 768
Touch		True-flat PCAP touch with multi-touch support
I/O & Expansion		
Serial Port		4, DB9 x 2 + RJ45 x 2 + optional COM 5 / COM 6 via converter cable
Parallel Port		1, via optional conversion cable through service window
Standard USB Port		6, USB 3.0 x 4 + USB 2.0 x 2
PoweredUSB Port		Optional 24V x 1 + 12V x 3 via GEN8E base
LAN Port		10/100/1000 Mb x 2
Display Port		VGA x 1, 12V support for Posiflex monitors; mini-HDMI x 1
CR Port		1, control 2 CR via optional Y-cable
PS/2 Port		1, via optional conversion cable through service window
UPS Port		Yes, battery optional
Audio		1 x internal 2W speaker + Line-out
Expansion Slot		M.2 slot x 1 for WIFI
Physical Dimension		
Dimension (W x D x H in mm)		372 x 320 x 252.7
Weight (N. W. in kg)		5.86
Environmental		
Operating Condition		0°C - 40°C, 20%RH - 90%RH (Equipped with HDD); 0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)
Storage Condition		-20°C - 70°C, 10%RH - 90%RH
Built-in Options		
WiFi		M.2 WiFi/BT module
Attachment Options		
POS Monitor		Non-touch TFT LCD: 7" (bezel type)/9.7" (bezel-free/bezel type)/12.1"/14" (bezel-free)/15" (bezel-free/bezel type); PCAP touch TFT LCD: 9.7"/14"/15"; Resistive touch TFT LCD: 15"
Line Display		2 x 20 rear-mount VFD/LCD customer line display; 7" color LCD graphical customer line display
Peripherals		MSR; iButton; Rotatable 2D scanner; RFID; Fingerprint Sensor; Key Keypad

\* Designed and Manufactured in Taiwan by Posiflex Technology, Inc.  
 \* The product information and specifications are subject to change without prior notice.  
 \* Please refer to the website for more attachment options.

Certifications: EN202001V1



**POSIFLEX TECHNOLOGY, INC.**  
 No. 23, Datong St., Tucheng Dist., New Taipei City 23679, Taiwan  
 Tel : +886-2-2268-5577 E-mail : sales@posiflex.com.tw  
 Fax : +886-2-2268-5388 www.posiflex.com

Authorized Distributor / Reseller

Flexible! Powerful! Elegant!



# XT-7315

High-End Fanless POS Terminal



The **XT-7315** is the companion of the XT-6315, which has been enhanced with 8th generation Intel Coffee Lake CPUs, which is powerful enough to handle any task imaginable that comes its way.

### Sleek Look

The XT-7315 comes from new Posiflex design language. Slimmer than ever, it is a sharp departure from the traditionally conservative Posiflex terminal design. Every curve and detail of the XT-7315 is carefully thought out to make itself one of the most visually desirable terminals in the market.

### Scalable Performance

A wide range of CPU options from Intel Celeron to Core i7 to fit each unique need.

### Multi-Position Folding Base (U.S. Patent 9004436)

The XT-7315 provides the selection of two foldable bases, the curvy slim GEN7E base and the larger but practical GEN8E base. The foldable base can be configured into "Flat Folded Mode" to save the shipping package volume, "Low Profile Mode" to allow greater interaction between the cashier and the customer, and the traditional "Full Extended Mode". All this can be achieved with a simple pull of the hidden lever.




Full Extended Mode



Low Profile Mode



Flat Folded Mode

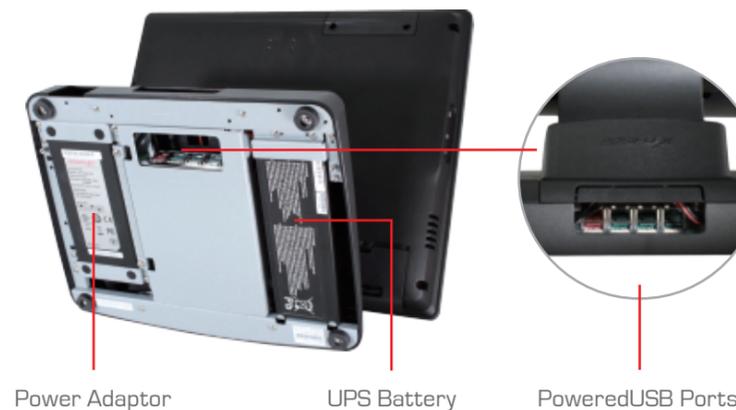

### Patented Fanless Technology

Solve the fan maintenance issue and provide silent mode operation, which is ideally suited for high-end boutique stores or hospital environments.

### GEN8E Base (U.S. Patent 9004436)

Optional GEN8E base integrates internal power adaptor and PoweredUSB port into the base stand, which keeps counters clutter-free.